

### automatic Semkit® package mixer

The Semco® model 388 Semkit® package mixer provides complete automatic mixing of filled Semkit® packages. Use of the mixer will reduce worker fatigue and assures the user a more thorough and consistent mix kit to kit.

Complete mixing of a Semkit® package is achieved by stroking the rotating dasher rod from one end of the filled cartridge to the other. The rod stroking is accomplished through a reversing air cylinder. Rotation of the dasher rod is accomplished by using a low speed, high torque gear motor. The timer automatically shuts off the mixer when the pre-set mix cycle has been completed. The mixer is made of heavy duty construction to withstand the rigors of industrial use.

Use of this mixer on a production line will significantly increase productivity. While one Semkit® package is mixing, the other can be dispensed.

#### Features

Quick disconnect bayonet lock cap permits rapid cartridge change.

During operation, constant pressure is exerted on the plunger to reduce induction and entrapment of air into the material.

A simple spindle change and two-way stroke adjustment permits mixing of 2.5, 6 and 8 oz. packages with the standard model.

The timer automatically shuts off the mixer at a pre-set mix time.

Dual way shafts with oilite bearings provide smooth strokes and longer machine life.


Operating requirements: 40 to 90 PSI, (1.2 CFM), and 115 VAC electric.

Shipping weight: 75 lbs.

Available in four models:

Standard, 1 oz., 1/10 gallon and 20 oz.

(Standard size fits 2.5, 6 and 8 oz. Semkit® packages.)

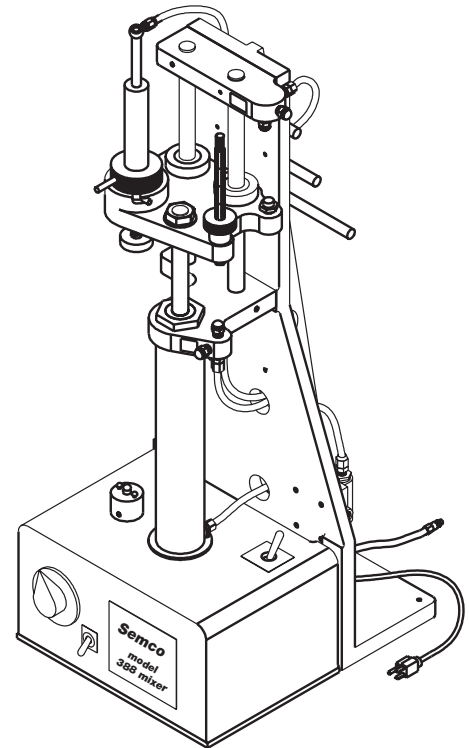

Part no.	Description
221269	Model 388 standard for use with 2.5, 6 and 8 oz. Semkit® packages NSN #4940-00-492-9268.
230323	Model 388-1/10 for use with the 1/10 gallon Semkit® package.
231145	Model 388-20 for use with the 20 oz. Semkit® package.
232410	Model 388-1 for use with the 1 oz. (mini) Semkit® package.